


Cyphertag® Accessories



The product is suitable for numerous applications, including full performance monitoring of hands-free Cyphertag® readers, key security in prisons, security institutions, safety tracking applications, and more.

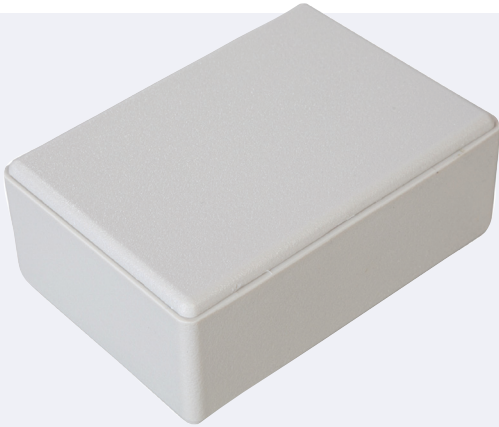

AVR1 | Aerial Interface Unit

An aerial interface unit (AVR1) provides the interface between the RV1 & RVR1 readers and the loop antenna. Other features include visual tag read and tuning indicators.

Features

- ✓ Tuning indicator
- ✓ Visual and audible tag read indicator



Technical Specification

Specification	Details
Power Requirements	5V DC, (supplied by RV1-RVR1 reader)
Dimensions	100 x 63 x 40mm
Weight	135g
Temperature Range	-20°C to +60°C (-4°F to 140°F)
Housing	White ABS
LED function	RED - Remove capacitance GREEN- Add capacitance AMBER- Tag read



UK MANUFACTURER

Identec Ltd 5 Mercantile Rd
Houghton le Spring DH4 5PH

+44 (0)191 584 4084
info@identec.com

identeclimited
Web www.identec.com

With nearly 40 years of experience in touch-free radio frequency identification systems, our technology products are used around the globe, providing innovative solutions for a wide range of application and industries. Check out our full product range at www.identec.com or to discuss your bespoke requirements regarding our RFID products please [get in touch](#).